




NEPTUNE

A battery line addressed to the fields of marine and leisure, planned and designed to meet every need and application for starting and board services.


The product ensures high safety quality standards for the resistance to charge and discharge cycles and vibrations.







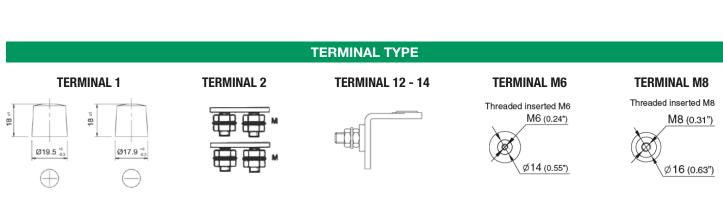


POLARITY









STARTING flooded acid

Batteries tested over time and characterized by good starting power combined with high cycling performances through the use of thick plates. On MAR 330 and MAR 450 the maze caps, which prevent the leakage of electrolyte even at high inclinations, ensure high security standards, while with the magic eye on the top it is possible to monitor the status of the battery. The side handles, found on all batteries, offer excellent handling. **Batteries for pleasure crafts and offshore**.

ID code	Volt	Capacity	pleasure crafts	A EN	Polarity	Terminal	Weight Kg.	Lay out
		Ah C20	rged with acid)	EN	rolarity	type	(+/- 3%)	Lay out
JIAIIIIII OI	LLISON	IL DUATO (Gilai	gea with acia)					~ 284 ~ ↑ 175 ~
MAR 330	12	80	330	540	1	1	16,2	25 - 29 - 29 - 20 - 20 - 20 - 20 - 20 - 20
MAR 450	12	100	450	760	0	1	25,0	3333
MAR 500	12	135	500	850	3	1	37,3	+ (************************************
MAR 650	12	180	650	1000	3	1	46,1	
MAR 750	12	225	750	1150	3	1	63,2	+ 0000000000000000000000000000000000000
STARTING OF	OPEN S	SEA BOATS (dr)	y charge)					
MAR 900	12	312	900	-	3 front.	12-14	97,0*	560 - 400 - 4
6PN10	12	240	600	-	4 front.	2	69,0*	+ 635 - 275 +
6PN14	12	320	900	-	4 front.	2	98,0*	

^{*} Charged battery weight

STARTING AND BOARD SERVICES, LEISURE AND OPEN SEA sealed AGM

Sealed batteries with AGM technology that enable maximum security and functionality, thanks to high starting power and endurance to charge and discharge cycles. Maintenance free, these batteries can be mounted in any position to make the most of volumes available. Batteries for cabin cruisers, yachts and large sailboats.

ID code	Volt	Capacity (Ah) 20 hour - 1,75 v/el	Capacità (Ah) 5 hour - 1,70 v/el	A EN	Polarity	Terminal type	Weight Kg. (+/- 3%)	Lay out
ASB 70	12	70	-	760	0	1	19,4	278 175 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
ASB 80	12	80	-	800	0	1	21,8	315 175
ASB 92	12	92	-	900	1	1	21,5	353 175
ASB 100	12	100	85	510	1	М6	32,8	329 172 (a) (b) (c) (d) (d) (d) (d) (d) (d) (d) (d) (d) (d
ASB 150	12	150	127	640	1	M8	46,8	483
ASB 200	12	200	170	1000	4	M8	68,0	500 - 226 - 2

BOARD SERVICES & LEISURE sealed AGM

These gas recombination sealed batteries are safe, because leakage of electrolyte free and maintenance free. They are reliable thanks their high endurance to charge and discharge cycles and vibration. They allow maximum installation security in any environment and position.

Batteries for extra and emergency power on campers, caravans or for camping in general.

ID code	Volt	Capacity (Ah) 20 hour - 1,75 v/el	Capacity (Ah) 5 hour - 1,70 v/el	Polarity	Terminal type	Weight Kg. (+/- 3%)	Lay out
LSB 80	12	80	66	1	M8	27,2	260 ©
LSB 100	12	100	85	1	M6	32,8	329 172 172 172 172 172 172 172 172 172 172
LSB 120	12	120	102	1	M6	38,0	61Z 61Z 50Z 50Z
LSB 150	12	150	127	1	M8	46,8	483
LSB 200	12	200	170	4	M8	68,0	500 228



Headquarters

FIAMM Energy Technology S.p.A.

Viale Europa, 75 36075 Montecchio Maggiore (VI) - Italy Tel. +39 0444 709311

Fax +39 0444 709878

A Hitachi Group Company

info.starter@fiamm.com www.fiamm.com www.fiammnetwork.com











Find out all about the new FIAMM products using the QR code!